
## Inline Break-In w/ Set of 4s

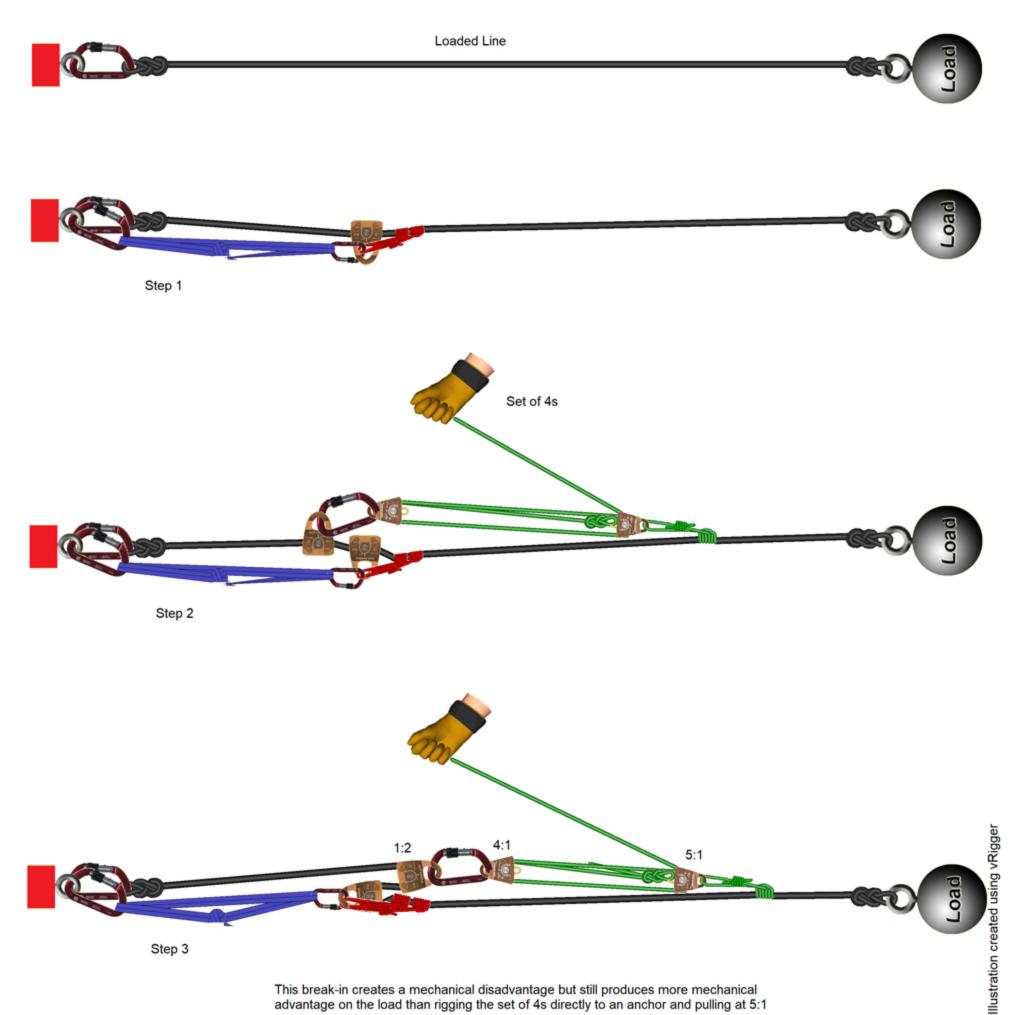

This break-in creates a mechanical disadvantage but still produces more mechanical advantage on the load than rigging the set of 4s directly to an anchor and pulling at 5:1